

Pump type: Submersible vortex pump
Application: Waste water, sewage

Pump data

Solids passage 80 mm
Discharge/ Suction diameter 100 mm/ 80 mm
Impeller type: Vortex
Impeller diameter 200 - 155 mm
Recommended min. flow 6 l/sec (21 m3/h)
Weight 265 kg

Motor

Mains: 50 c/s – 3 phase
Rated shaft power 20.0 kW
Rated electrical power 22.7 kW
Nominal speed 2925 rpm
Motor efficiency 88 %
Power factor (cos phi) 0.89
Degree of protection IP 68
Isolation class F (155°C)
Max. water temperature 40°C
Standard cable length 10 m

Materials

Pump casing Cast iron GG 25 (EN-GJL-250)
Impeller S.g cast iron GGG 40 (EN-GJS-400-15)
Motor unit Cast iron GG 25 (EN-GJL-250)
Shaft AISI 431
Alt: AISI 316
Bolts AISI 316
Elastomers Nitrile (NBR) or neoprene (CR)
Alt: viton (FPM)
Neoprene (CR)
Electrical cable Oil
Seal lubrication Oil
Seal pump side Silicon carbide – silicon carbide
Seal motor side Carbon - Ceramic
Coating Two components polyurethane

Installation options


Guide bar coupling OWK 100
Freestanding 4" hose connection or
Including support (VRS) G 4" threaded connection
Dry Installation vertical or horizontal install.
Including cooling system discharge flange NW100
(ODO) suction flange NW100




Optional

- Version with cooling system
- Flameproof version, to class: II 2 G Ex d IIB c T4
Standard: II 2 G Ex b c d IIB T4 Gb
With Frequency control: II 2 G Ex b c d IIB T3 Gb
- Cable protective sheathing (AISI 316)
- Water detector in motor and oil chamber
Flameproof version with external cable

P2 ISO 9906 grade 2

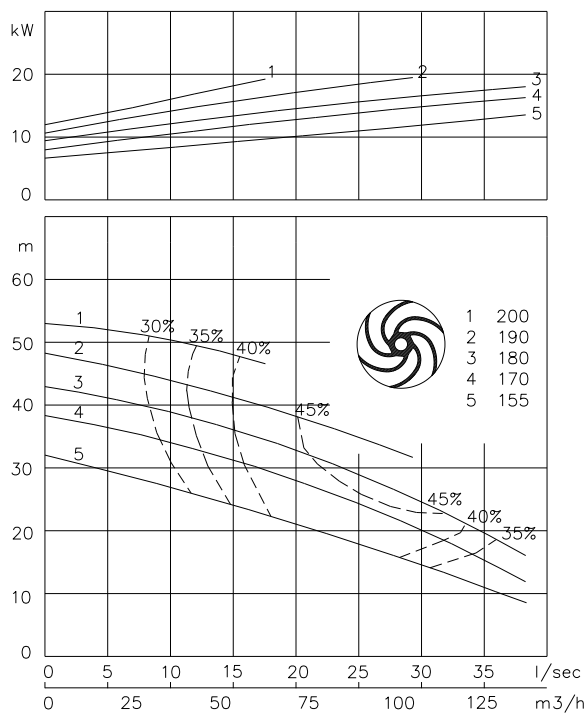

dimensions in mm

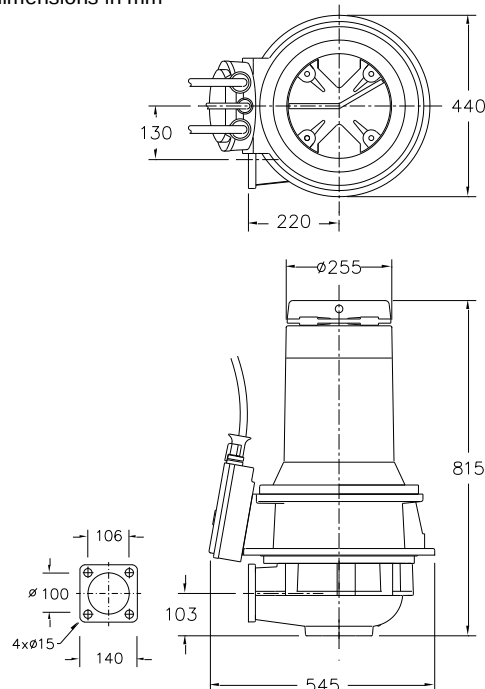

Connections

		Electrical cable size [mm2]					
voltage	current	motor protection and/or water detector		flameproof version			
		direct start	star-delta start	direct start	star-delta start		
230	64.1	4G16 + 4G2.5	2x4G6 + 4G2.5	4G16 + 4G2.5	2x4G6 + 4G2.5		
400	36.9	4G10 + 4G2.5	7G2.5 + 4G2.5	4G10 + 4G2.5	7G2.5 + 4G2.5		
500	29.5	4G6 + 4G2.5	7G2.5 + 4G2.5	4G6 + 4G2.5	7G2.5 + 4G2.5		
starting current DOL start : 5.5 x rated current							
starting current YD start : 1.8 x rated current						* other voltages on request	